



## DH65 S2/ DH65L S2

SHORT AUTOMATIC BAR FEEDER

Diameter range 棒材適用直徑: 5 – 65




YOUR ONE-STOP-SHOP  
FOR MACHINE-TOOL PERIPHERALS

## TECHNICAL SPECIFICATIONS 技術規格

DH65 S2/ DH65L S2			
Diameter 直徑	mm	ø5 – 65	
Model 機型	M	1.2	1.5
Magazine capacity 棒材容量		ø 5mm x 114 pcs	
Overall length 機台長度	mm	1660	1960
Overall width 機台寬度	mm	1126	
Max. bar length 最長棒材長度	mm	1210	1510
Weight 重量	kg	298	328
Air pressure 空壓	kg/cm <sup>2</sup>	5~7	
Power supply 電源供應		220V 3p (Varying power supply is available depending on applications 視應用條件，可選配不同電源供應)	
Spindle Height 主軸高度	mm	850 ~ 1250	
Headstock Type 車床型式		Fixed 走刀式	
Options 選配			
X/Z-axis Retraction System X或Z軸移動裝置、Support Stand 支撐座			

## FLOOR PLAN 外部尺寸 (mm)

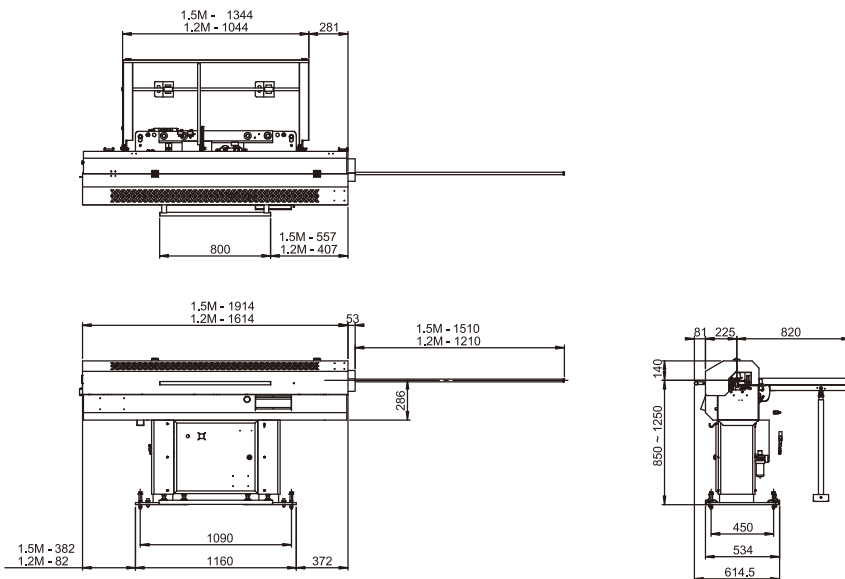

This product is completed operation and product liability insured.  
本產品已投保瑞士法郎100萬(約新台幣3200萬)產品責任險，請安心使用

Design and specifications are subject to change without prior notice.  
本公司不斷研究創新，設計規格如變更恕不另行通知



LNS Taiwan Co., Ltd. 台灣艾恩司股份有限公司  
No.133, Lane 418, Sec. 3, Xinan Rd., Wuri  
District, Taichung City 41469, Taiwan  
41469 台灣台中市烏日區溪南路三段418巷133號

Tel: +886-4-2335-4920 sales@LNS-asia.com  
Fax: +886-4-2335-2056 www.LNS-asia.com



Bar diameter changing simply and quickly, shorten the downtime and maximize the efficiency

更換棒材直徑簡單快速，縮短停工時間並使效率最大化



User-friendly HMI can be operated easily, display alarm messages and position tracking. Remote control box for convenience.

人性化人機介面操作簡易，顯示異常訊息與位置偵測；可移動式手控盒協助方便操作

- No strictly requirement for bar straightness.
- Extremely short of bar changing cycle time.
- Calculating the bar position accurately by encoder.
- Pneumatic rodless cylinder drive system.

- 棒材真直度無須嚴格要求
- 換料循環時間極短
- 譯碼器精確計算棒材位置
- 氣壓式無桿缸驅動裝置